


SPECIFICATIONS

- Made of AISI 304 (Y) or AISI 316 (X) steel
- Side inlet with domed lid
- Easy maintenance
- 360° bag seal
- Eyebolt closure
- Integrated handle on lid
- Connections: Threaded (B) or Flanged (D)
- Compliance with PED Directive 2014/68/EU Art 4.3

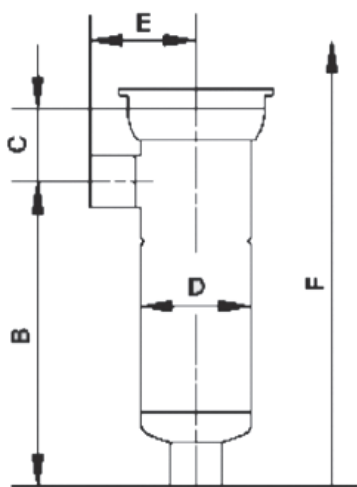

FLOWLINE FBF -	0101-AD10-050B	0102-AD10-050B	0101-AD10-050D	0102-AD10-050D	
N° Bags	1	1	1	1	
Bag Size	01	02	01	02	
Max. flow rate (m³/h)	20	40	20	40	
Material	AISI 316	AISI 316	AISI 316	AISI 316	
Max pressure (bar)	10	10	10	10	
Max. temperature (°C)	120	120	120	120	
Volume (l)	15.5	27	15.5	27	
Weight (kg)	17	23	21.5	27	
Conn. IN and OUT	2"	2"	DN 50	DN 50	
Connections	BSP	BSP	Flanges	Flanges	
Breather	1/4"	1/4"	1/4"	1/4"	
Housing dimensions (mm)	B	489	884	487	882
	C	85	85	85	85
	D	195	195	195	195
	E	150	150	150	150
	F	1040	1820	1040	1820