

GAS FILTER CARTRIDGES - CFG

SPECIFICATIONS


- Filter medium: Needle-punched polyester felt
- Support mesh: Dual epoxy mesh
- Degree of filtration: 5 – 20 µm (nominal)
- Adhesive: Two-component epoxy resin
- Gasket: Polyester felt
- Ends: Galvanised or stainless steel mouldings
- Inner support: Galvanised or stainless steel perforated plate

APPLICATIONS


- Gas filtration

Max. operating conditions

- Temperature: 110°C
- Max. differential pressure: 2.5 bar

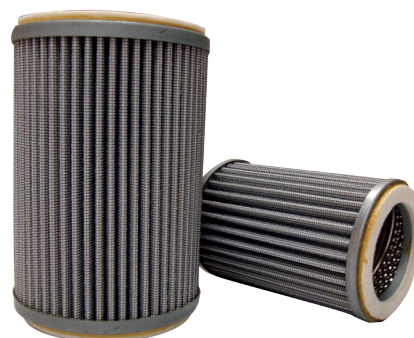

TYPE G	FILTERING SURFACE AREA cm ²	A	B	C	D	Weight kg
0.5	600	80	35	112	120	0.200
1	1250	95	50	157	165	0.320
1.5	2300	120	68	202	210	0.520
2	4700	165	86	262	270	1.200
2.5	7250	200	110	275	283	1.500
3	9800	252	138	312	320	2.300
3.5	9500	299	186	242	252	3.000
4	14500	299	186	407	415	3.600
5	23000	390	246	462	470	5.400
6	42000	475	320	617	625	7.500
8	64300	600	370	642	650	10.200

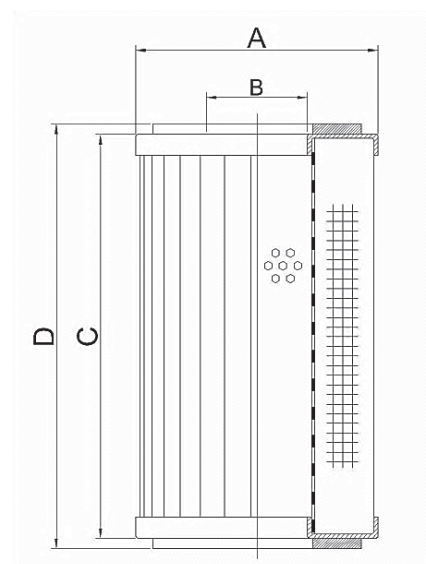

COMPOSITION CODE	CFG	Y	1	5	LE
	Model	Ends and Plate Material	Type G	Filtration	Options
		- = Galvanised steel	0.5 1 1.5 2 2.5 3 3.5 4 5 6 8	5 µm	- = No plate
		Y = AISI 304		20 µm	LE = External late
		X = AISI 316			