


INERTIAL PAINT OVERSPRAY COLLECTOR - CIV

Filter stage: **I**
 Filtration class: EN ISO 16890 - (ex EN 779: **G**)
 Structure: **multilayer perforated bellows cardboard**

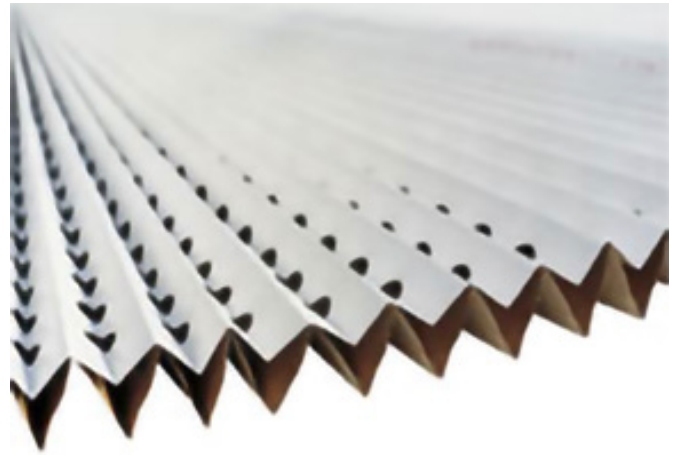

EFFICIENCY		35%	45%	55%
FILTRATION CLASS: EN 779		G1	G1	G1
THICKNESS (mm)		25	65	70
Initial pressure drop (speed = 1.0 m/s)	Pa	30	55	60
Recommended end pressure drop	Pa	130	130	130
Maximum pressure drop	Pa	250	250	250
Maximum build-up: kg/m ²	14 - 18			
Temperature	180°C			
Relative humidity	90%			

CIV	DIMENSIONS		SURFACE AREA
	Cod.	mm	m ²
	44	900x9240	10.0

Filter composition code

CIV

44

65A

Dimension Code

Thickness
 25 = 25 mm
 65 = 65 mm
 70 = 70 mm