

MELT BLOWN BIG DUAL GRADIENT CARTRIDGE - PPW-B

SPECIFICATIONS

- Filtration efficiency 85%
- Dual Gradient
- Nominal filtration from 1 to 50 micron
- Available in 9" 3/4 and 20"
- Outer diameter 100 mm (±1)
- Inner diameter 28.5 mm (±1)
- Compliance with directives for contact with drinking water M.D. 174/04



APPLICATIONS

- Cosmetics
- Pharmaceutical
- Chemical
- Food
- Photochemistry and printing


Max. operating conditions

- Temperature 80°C
- Max differential pressure at 25°C 3 bar
- Pressure drop for replacement at 25°C 1 bar

Building materials

- 100% Polypropylene

Portata (Acqua, 9" 3/4)

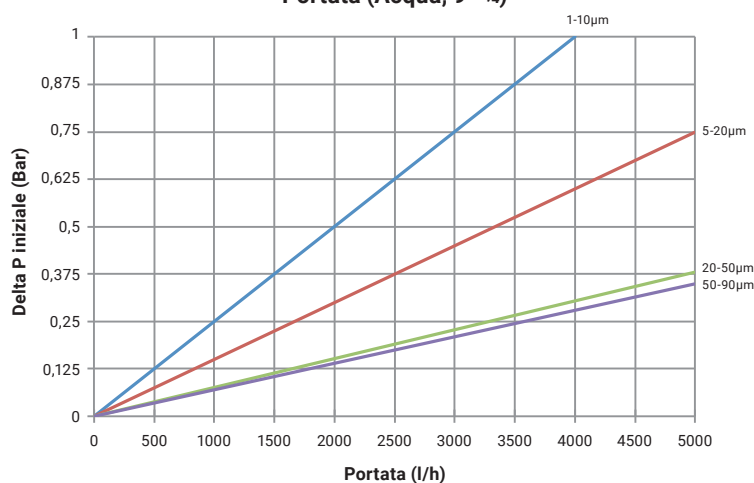

COMPOSITION CODE	PPW-B	1	2	0	0	0
	Model	Micron	Length	Type	End Materials	Gaskets
		1 - 10	09 = 9" 3/4 (24.8 cm)	0 = DOE	0 = None	0 = None
		5 - 20	2 = 20" (50.8 cm)	1 = DOE with gasket	S1 = AISI 304	1 = Silicone
		20 - 50		2 = DOE end with gasket	S2 = AISI 316	2 = Epdm
		50 - 90				3 = Nbr
						4 = Viton