

SPECIFICATIONS

- Brass head and ring nut
- Sump in transparent San or AISI 304
- Suitable for DOE (Double Open End) cartridges
- Pressure gauge ready
- With condensate drain - SC
- Suitable for cartridges: DOE (Meltblown, Wrapped Wire) SOE mod. MMXM and MMSX (Metallic)

Max. operating conditions:

Min/max operating temperature

- Brass-SAN from 0°C to 30°C
- Brass-Stainless from 0°C to 90°C


Max Operating Pressure

- Brass-SAN 8 bar
- Brass-Stainless 15 bar



Brass - Stainless Steel Model		
Connections	Height	L x H (mm)
1/2"	5"	135 x 185
	7"	135 x 235
	9" 3/4"	135 x 337
3/4"	5"	135 x 185
	7"	135 x 235
	9" 3/4"	135 x 337
	20"	135 x 565
1"	5"	135 x 185
	7"	135 x 235
	9" 3/4"	135 x 337
	20"	135 x 565
1" 1/4"	9" 3/4"	150 x 355
	20"	150 x 587
1" 1/2"	9" 3/4"	150 x 355
	20"	150 x 587
2"	9" 3/4"	162 x 363
	20"	162 x 595

Brass - SAN Model		
Connections	Height	L x H (mm)
1/2"	9" 3/4"	135 x 337
	20"	135 x 565
3/4"	9" 3/4"	135 x 337
	20"	135 x 565
1"	9" 3/4"	135 x 337
	20"	135 x 565
1" 1/4"	9" 3/4"	135 x 337
	20"	135 x 565
1" 1/2"	9" 3/4"	135 x 337
	20"	135 x 565
2"	9" 3/4"	135 x 337
	20"	135 x 565

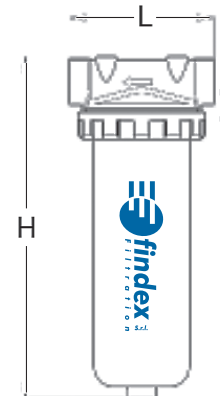

COMPOSITION CODE	MNC	05	0	I	1"	SC
	Model	Length	Head material	Sump Material	Connections	Condensate drain
		05 = 5"	0 = Nickel-plated Brass	P = Transparent SAN	1 = 1/2"	- no
		07 = 7"		I = Stainless	2 = 3/4"	- Sc
		09 = 9" 3/4"			3 = 1"	
		20 = 20"			4 = 1" 1/4"	
					5 = 1" 1/2"	
					6 = 2"	