


SPECIFICATIONS

- Body made entirely of AISI 316L
- Suitable for DOE Coreless cartridges
- V-Clamp closure
- Compliance with PED Directive 2014/68/EU Art 4.3

APPLICATIONS

- Liquid filtration (water)

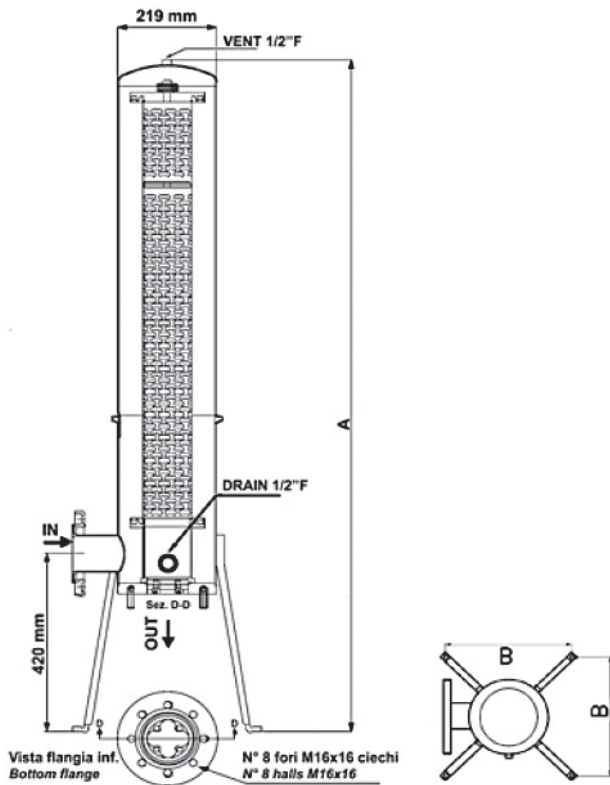

MONOCART-CL MNC-CL	MODEL	
	MNC-CL20	MNC-CL40
Max. conditions of use (bar/°C)	8/80	8/80
*Flow rate (m³/h)	30	30
Housing dimensions (mm) A	1200	1600
Housing dimensions (mm) B	355	355
Volume (l)	44	66
Weight (kg)	33	44
In/Out Fittings	DN80	DN80
Cartridge length	20"	40"
Max. cartridge inner diameter	114 mm	114 mm
Max. cartridge outer diameter	152 mm	152 mm

* Flow rate refers to nominal water filtration 5 µm - Δp: 0.15 bar