


SPECIFICATIONS

- Low pressure drops
- High oil capturing efficiency
- Easy cleaning
- Robust construction ensures durability
- Drain 1/2"
- Coalescing cartridge that removes up to 0.01 micron with 0.01 ppm oil residue

Technical data

- Operating temperature: 4°C to 80°C
- Max. operating pressure: 14 bar

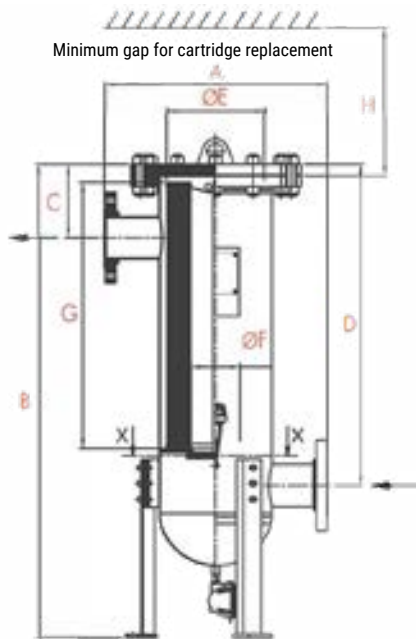

Code	Flow rate Nm ³ /h	Ø IN OUT connections	Dimensions (mm)							
			A	B	C	D	ØE	ØF	G	H
FME-150	255	DN50	500	1003	209	459	203	103	305	330
FME-300	510	DN50	500	1105	209	559	203	103	407	435
FME-600	1020	DN50	500	1461	209	916	203	103	762	790
FME-800	1360	DN80	500	1655	279	1084	203	103	915	950
FME-1200	2040	DN80	600	1520	281	931	254	103	762	790
FME-1600	2720	DN80	600	1671	281	1086	254	103	915	950
FME-2100	3570	DN100	700	1575	335	953	300	129	762	790
FME-2750	4675	DN100	700	1726	335	1100	300	129	915	950
FME-4200	7140	DN150	800	1670	393	983	365	181	762	790
FME-6000	10200	DN150	800	1925	393	1238	365	181	950	1045
FME-8000	13600	DN200	850	2020	417	1277	386	233	1016	1045
FME-10000	17000	DN250	1000	2118	417	1307	407	337	1016	1045
FME-12000	20400	DN300	1000	2688	497	1847	437	337	1524	1550

Correction factor when operating pressure varies

Operating pressure (barg)	1	3	5	7	9	11	13	14
PSI	15	44	73	100	131	160	189	200
Factor	0.5	0.71	0.87	1	1.12	1.22	1.32	1.38