

RIGID POCKET FILTERS – TRVFE

Filter stage: **II**

Filtration class: EN ISO 16890 - (ex EN 779: **M - F**)

Frame: **sturdy moulding, plastic, non-toxic, incinerable**


Filter medium: **glass microfibre**

Separators: **thermoplastic**



EFFICIENCY: EUROVENT		65%	85%	95%	98%
FILTRATION CLASS: EN 779		M6	F7	F8	F9
Initial pressure drop	Pa	60	70	80	105
Recommended end pressure drop	Pa	250	250	250	250
Temperature	70°C				
Relative humidity	100%				

TRVFE	DIMENSIONS		FLOW RATE (q _v)	SURFACE AREA
	Cod.	mm	m ³ /h	m ²
	13.14	402x592x287	2100	9.0
	5.14	287x592x287	1700	7.0
	18.14	490x592x287	2700	11.0
	26.14	592x592x287	3400	14.0

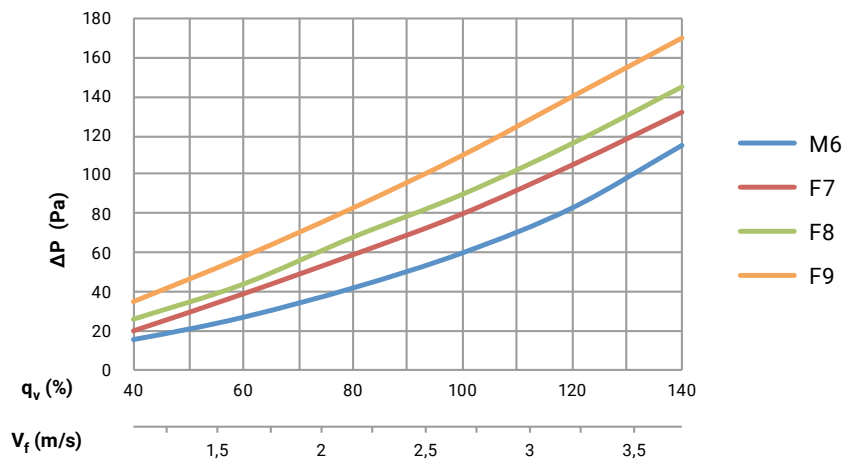

Filter composition code

TRVFE

18.14

3

F9

Dimension Code

No. pockets

Filtration class