


SPECIFICATIONS

- Made of AISI 316 (X) steel
- Side inlet with domed, orientable lid
- Improved accessibility
- Easy maintenance
- 360° bag seal
- Eyebolts closure
- Flanged connections DN 50 or DN80, 1”¹/₂ BSP
- Compliance with PED Directive 2014/68/EU Art 4.3
- Connections: Threaded (B) or Flanged (D)

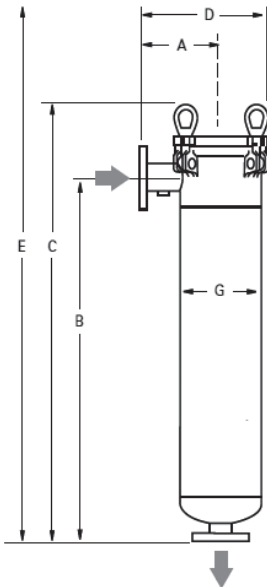

Also available in the following versions

- DUAL: two connected units via three-way valve
- MODULINE: two or more units connected via sleeves, flanges, T-connections

SIDELINE SBF -	0103-AD16-040B	0104-AD16-040B	0101-AD10-050D	0102-AD10-050D	0101-AD10-080D	0102-AD10-080D	0101-AS16-050D	0102-AS16-050D	0101-AS16-080D	0102-AS16-080D
N° Bags	1	1	1	1	1	1	1	1	1	1
Bag Size	03	04	01	02	01	02	01	02	01	02
Max. flow rate (m ³ /h)	6	12	20	40	20	40	20	40	20	40
Material	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316
Max pressure (bar)	16	16	10	10	16	16	10	10	16	16
Max. temp °C	160	160	160	160	160	160	160	160	160	160
Volume (l)	3	4.5	18	32	18	32	18	32	18	32
Weight (kg)	12	13	38	46	41	51	40	48	46	56
Conn. IN and OUT	1 1/2"	1 1/2"	DN 50	DN 50	DN 50	DN 50	DN 80	DN 80	DN 80	DN 80
Connections	BSP	BSP	Flanges	Flanges	Flanges	Flanges	Flanges	Flanges	Flanges	Flanges
Breather	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Housing dimensions (mm)	A	110	110	220	220	220	220	220	220	220
	B	300	455	495	889	495	889	495	889	495
	C	394	550	676	1070	676	1070	676	1070	676
	D	220	220	365	365	365	365	365	365	365
	E	484	640	965	1753	965	1753	1040	1820	1040
	G	114	114	219	219	219	219	219	219	219