


ACTIVATED CARBON CARTRIDGE FILTERS – F-PCA

Filter stage: **adsorbent**
 Plate frame: **sturdy painted steel**
 Containment mesh: **expanded galvanised steel**
 Adsorption element: **granulated activated carbon**
 Sealant: **Neoprene foam**



	DIMENSIONS		Q. NOM	CARBON VOLUME	N° CARTRIDGES	CARBON BED THICKNESS
	Cod.	mm	m³/h	dm³	n°	mm
PCA-1	9.26	305x610x470	1000 - 1250	27	6	35
	9.26	305x610x470	1250 - 1500	36	8	35
	31.26	610x610x470	2000 - 2500	54	12	35
	31.26	610x610x470	2500 - 3000	72	16	35
PCA-2	9.26	305x610x470	1250 - 1500	21	6	25
	9.26	305x610x470	1500 - 1850	28	8	25
	31.26	610x610x470	2500 - 3000	42	12	25
	31.26	610x610x470	3000 - 3750	56	16	25
PCA-3	9.26	305x610x470	1250 - 1500	27.5	5	33
	31.26	610x610x470	2500 - 3000	49.5	9	33

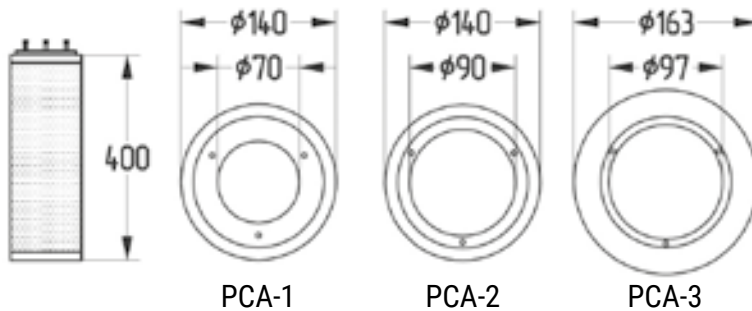

Filter composition code

F-PCA-1

9.26

12

VO

Dimension Code

N° cartridges

Type of carbon*

Strainer composition code

C

FCS

3

Dimension Code

Type of carbon*

*see Activated carbon – CA data sheet on page 198