


## RIGID POCKET FILTERS – TRVF

Filter stage: **II**  
 Filtration class: EN ISO 16890 - (ex EN 779: **M - F**)  
 Frame: **sturdy moulding, plastic, non-toxic, incinerable**  
 Filter medium: **glass microfibre**  
 Separators: **thermoplastic**



EFFICIENCY: EUROVENT		65%	85%	95%	98%
FILTRATION CLASS: EN 779		M6	F7	F8	F9
Initial pressure drop	Pa	60	70	80	105
Recommended end pressure drop	Pa	250	250	250	250
Operating temperature	70°C				
Maximum relative humidity	100%				

TRVF	DIMENSIONS		FLOW RATE ( $q_v$ )	SURFACE AREA
	Cod.	mm	m <sup>3</sup> /h	m <sup>2</sup>
	13.14	402x592x287	2100	11.8
	5.14	287x592x287	1700	9.3
	18.14	490x592x287	2700	14.5
	26.14	592x592x287	3400	18.5

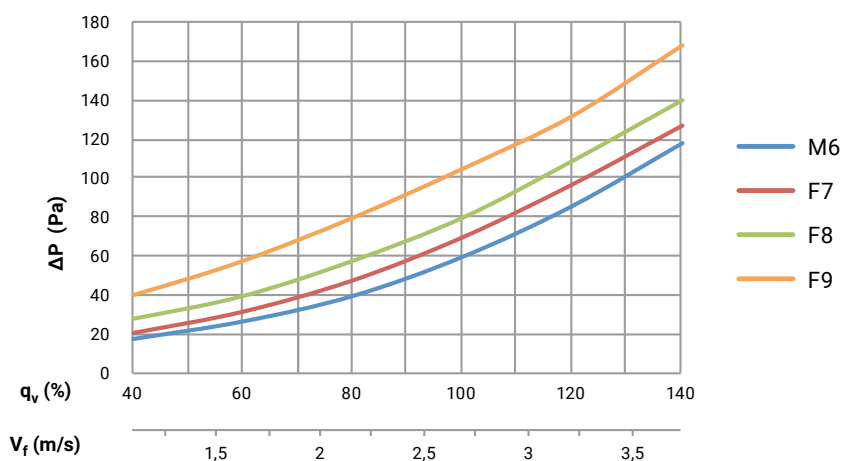

Filter composition code

TRVF

18.14

4

F8

Dimension Code

No. pockets

Filtration class