
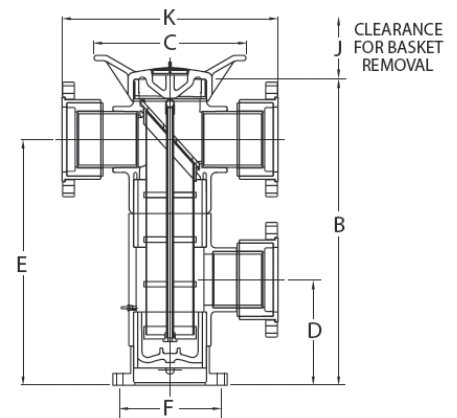


SIMPLEX BASKET STRAINER FILTERS IN PVC - FCSP

SPECIFICATIONS

- Quick strainer opening and extraction
- Wide range of strainers
- Low pressure drops
- Standard stainless steel filter strainers

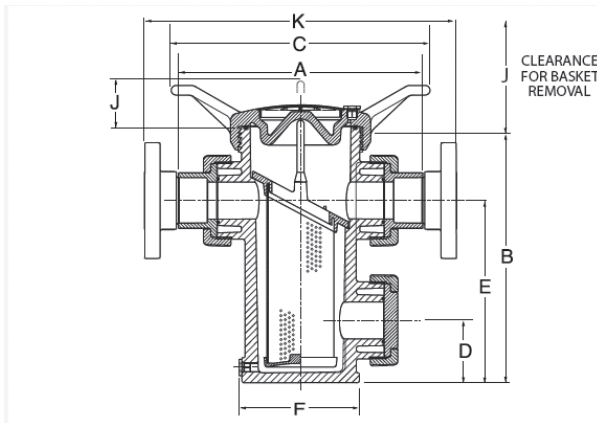

Sizes in mm

| Size | A | B | C | D | E | F | J | K | Weight kg | | Volume (l) |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----------|---------|------------|
| | | | | | | | | | Threaded | Flanged | |
| 1/2" | 219 | 245 | 279 | 57 | 171 | 109 | 203 | 274 | 3.4 | 4 | 0.8 |
| 3/4" | 219 | 245 | 279 | 57 | 171 | 109 | 203 | 280 | 3.4 | 4 | 0.8 |
| 1" | 219 | 245 | 279 | 57 | 171 | 109 | 203 | 296 | 3.4 | 4 | 0.8 |
| 1" 1/4 | 324 | 340 | 343 | 83 | 241 | 156 | 327 | 397 | 6.4 | 7.5 | 2.7 |
| 1" 1/2 | 322 | 340 | 343 | 83 | 241 | 156 | 327 | 404 | 6.4 | 7.5 | 2.7 |
| 2" | 324 | 340 | 343 | 83 | 241 | 156 | 327 | 414 | 6.4 | 7.5 | 2.7 |
| 2" 1/2 | 384 | 504 | 406 | 123 | 377 | 184 | 438 | 534 | 13 | 15 | 10.6 |
| 3" | 384 | 504 | 406 | 123 | 377 | 184 | 438 | 517 | 13 | 15 | 10.6 |
| 4" | 384 | 504 | 406 | 123 | 377 | 184 | 438 | 562 | 13 | 17 | 10.6 |
| 6" | n/a | 871 | 457 | 271 | 691 | 298 | 554 | 569 | n/a | 27 | 25.7 |
| 8" | n/a | 871 | 457 | 271 | 691 | 298 | 730 | 640 | n/a | 36 | 34.1 |

| Size | Material | Connections | Gaskets | Operating pressure |
|------------|-------------|---------------------|---------|--------------------|
| 1/2" to 4" | PVC or CPVC | Threaded or Flanged | Viton | 10 bar at 21°C |
| 1/2" to 2" | EASTAR | Threaded or Flanged | | 7 bar at 21°C |
| 6" to 8" | PVC OR CPVC | Flanged | | 10 bar at 21°C |

